


FRONT BUILD ROLLER
 VORBAUROLLE-EINBAU Elektrik
 FLECHETTE

997-077-68840

Figure
 Bild
 Figure

7768840

5994-02

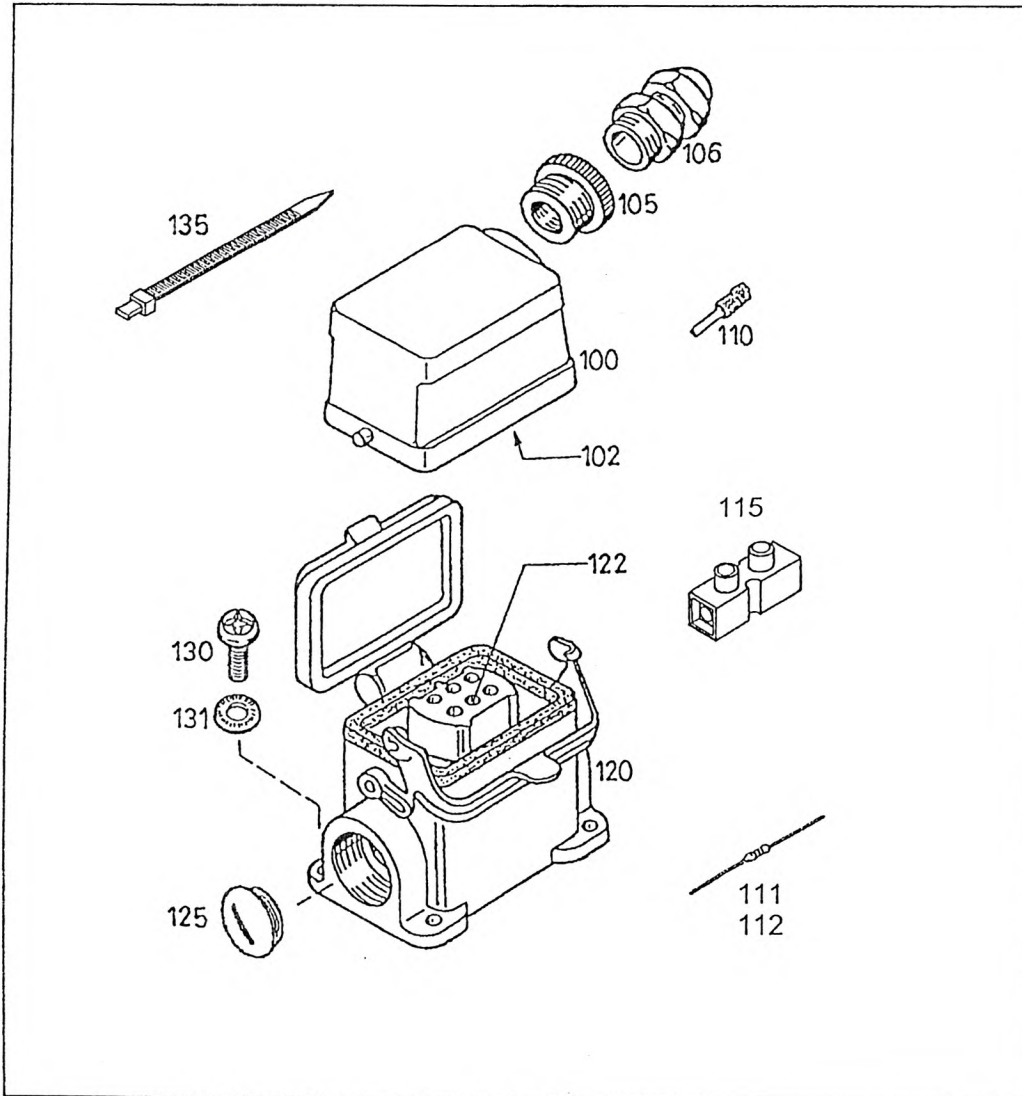

Item Pos. Réf	Part No. Teil-Nr. Pièce No	Designation Benennung Désignation	all alle tous	Qty/assy Stck/Variante Pièce/ensemble								Figure Bild Figure
				A	B	C	D	E	F	G	H	
100	997-007-50341	GROMMET HOUSING TUELLENGEHAEUSE BOITIER DE DOUILLE	1									
102	997-000-58937	PLUG INSERT 6pol+E STIFTEINSATZ ELEMENT FICHE CONTAC	1									
105	997-085-11754	SCREWED GLAND PG13,5-Pg11 REDUKTION REDUCTION	1									
106	997-070-06367	CABLE UNION Pg11 KABELVERSC HRAUBUNG RACCORD VISSE CABLE	1									
110	997-077-30362	TERMINAL 1-8 ADERENDHUELSE DOUILLE D EXTR D FIL	2									
111	997-070-07307	RESISTOR 1kΩ 0,25w WIDERSTAND RESISTANCE	1									
112	997-070-07308	RESISTOR 2kΩ 0,25w WIDERSTAND RESISTANCE	1									
115	997-000-34777	TERMINAL LEITUNGSVERBINDER BORNE	nB									
120	997-015-90925	BASE HOUSING SOCKELGEHAEUSE BOITIER DE SOCLE	1									
122	997-000-58935	PLUG INSERT 6pol+E BUCHSENEINSATZ ELEMENT FICHE CONTAC	1									
125	997-070-06519	THREADED PLUG Pg16 VERSCHLUSZSCHRAUBE BOUCHON FILETE	2									
130	997-009-73537	FILLISTER HEAD SCREW M5x12 LINSCHRAUBE VIS A TETE BOMBEE	4									
131	997-084-03772	LOCKWASHER 5 SICH-SCHEIBE RONDELLE SECURITE	4									
135	997-007-26789	CABLE TIE 4,8x188 KABELBINDER ATTACHE CABLE	6									